




SDS 6

DIMENSIONAL SPECIFICATIONS


#6 SDS (VACUUM)

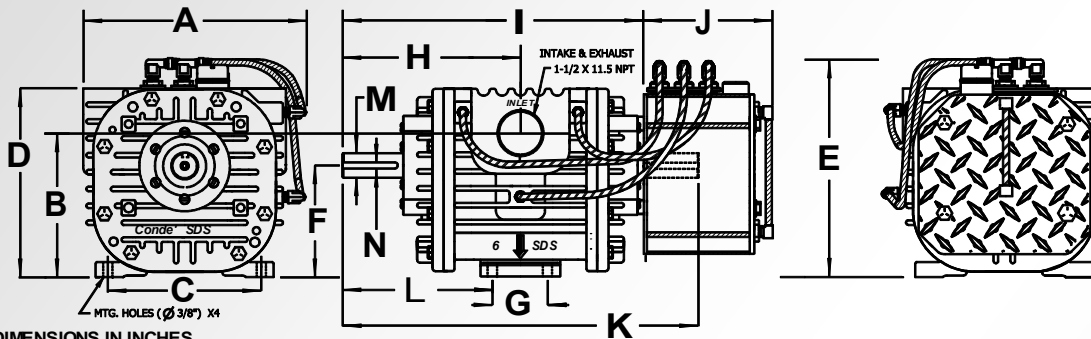

ALL DIMENSIONS IN INCHES

A	B	C	D	E	F	G	H	I	J	K	L	M	N
8-7/8	5-7/8	6-1/4	7-3/4	9-1/4	4-9/16	2-1/4	7-1/4	12-1/4	5-1/2	14-1/2	6-1/8	1.0	1/4 X 1/4

#6 SDS (VACUUM/PRESSURE)

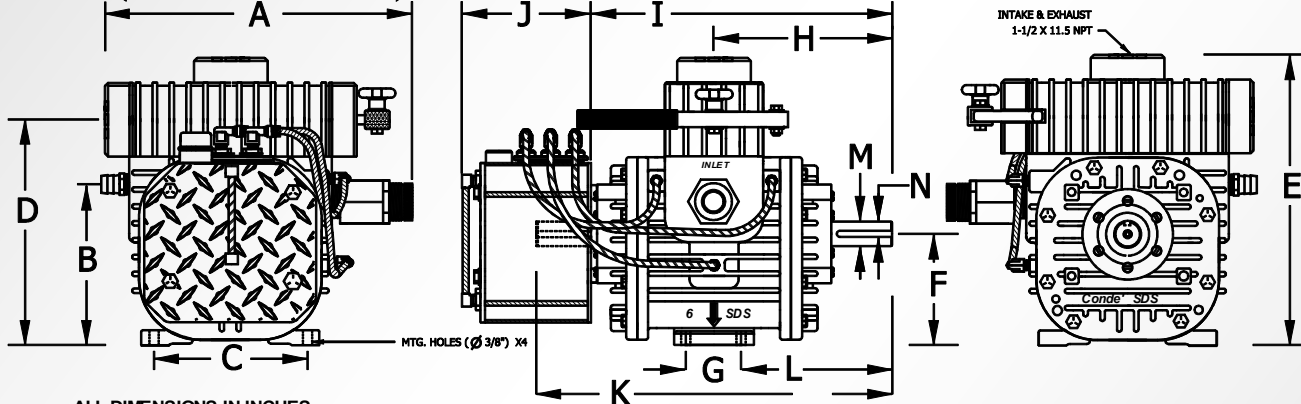

ALL DIMENSIONS IN INCHES

A	B	C	D	E	F	G	H	I	J	K	L	M	N
13-1/2	6-9/16	6-1/4	9-1/4	11-3/4	4-9/16	2-1/4	7-1/4	12-1/4	5-1/2	14-1/2	6-1/8	1.0	1/4 X 1/4

PERFORMANCE DATA

PUMP RPM	DISPLACEMENT		SCFM @ VACUUM				
	CFM		5	10	15	18	20
1200	79		67	46	38	30	25
1500	99		84	67	47	38	31
1750	115		98	78	55	44	36
PUMP RPM	DISPLACEMENT		SCFM @ PRESSURE				
	CFM		2	4	8	12	15
1750	115	111	108	105	99	92	

SPEED RANGE

1100 THRU 1500 RPM

MAXIMUM VACUUM

27" HG INTERMITTENT

20" HG CONTINUOUS

LUBRICATION

CONDE AUTOMATIC

PORT CONNECTION

1-1/2 - 11.5 NPT

SHAFT DIAMETER

1.0"

WEIGHT (VACUUM)

87 LBS

(VACUUM/PRESSURE)

92 LBS

WESTMOOR LTD.
906 WEST HAMILTON AVE
SHERRILL, NY 13461

PHONE: 800-367-0972

WWW.WESTMOORLTD.COM